

Fig. 1 is a perspective view of a curved, elongated device. It features a series of rectangular components (20, 21, 22, 23, 24) and circular components (25, 26, 27) arranged along its length. The device is secured by screws (36) and bolts (71). A cable (67) is connected to the device. The device is shown in a curved, elongated perspective.

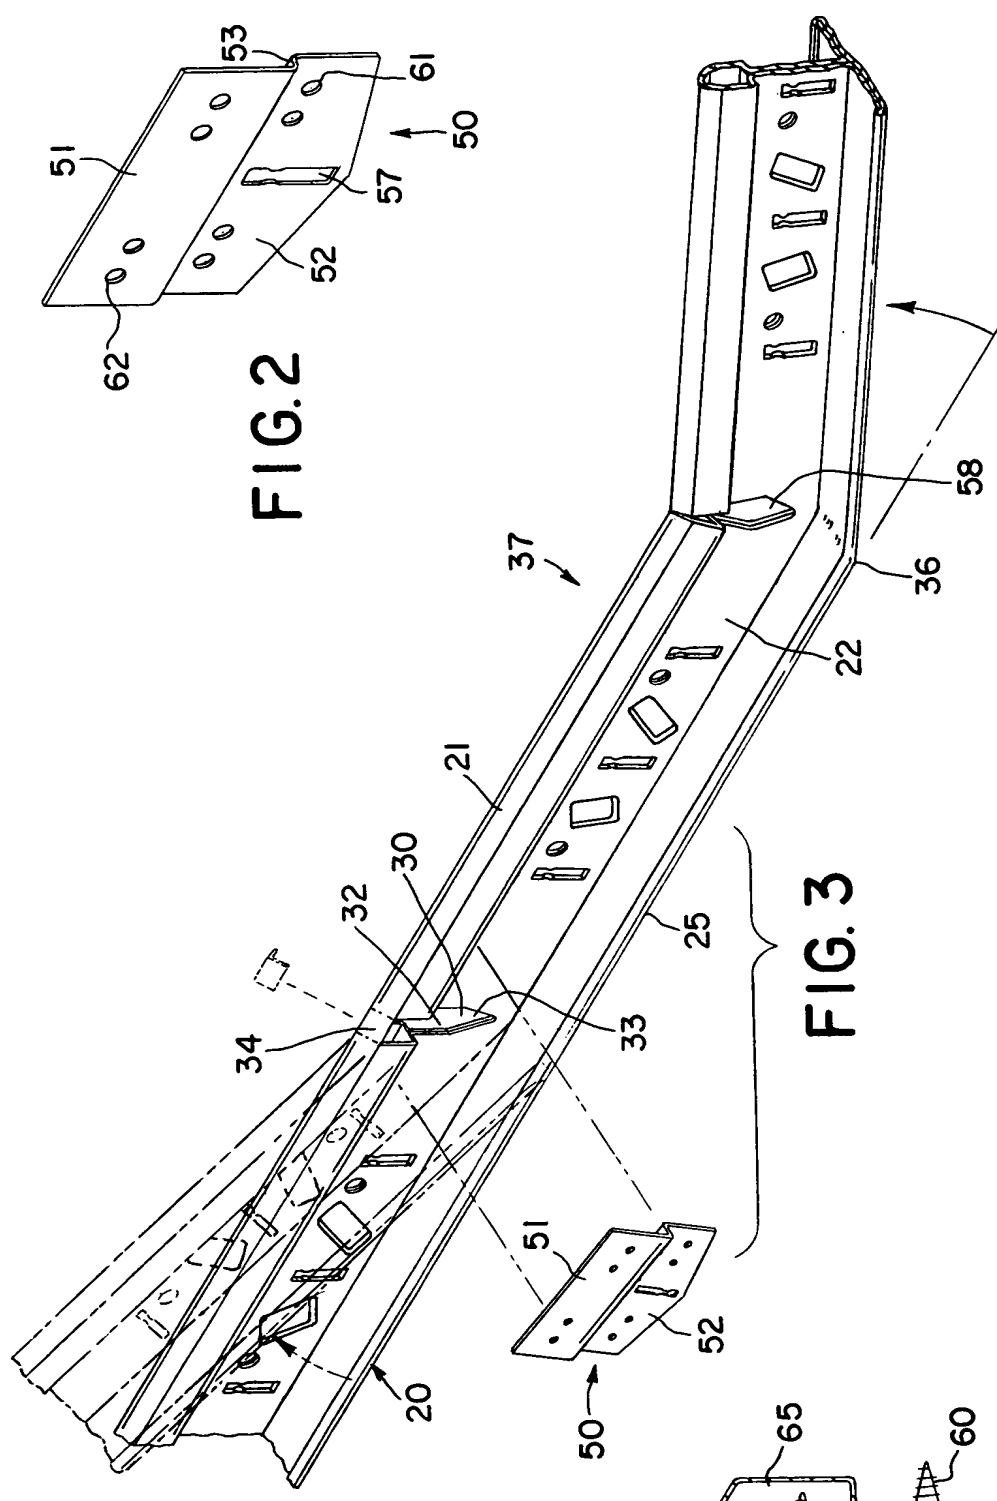


FIG. 2

FIG. 3

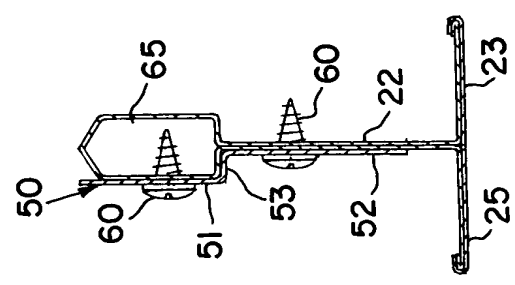


FIG. 4

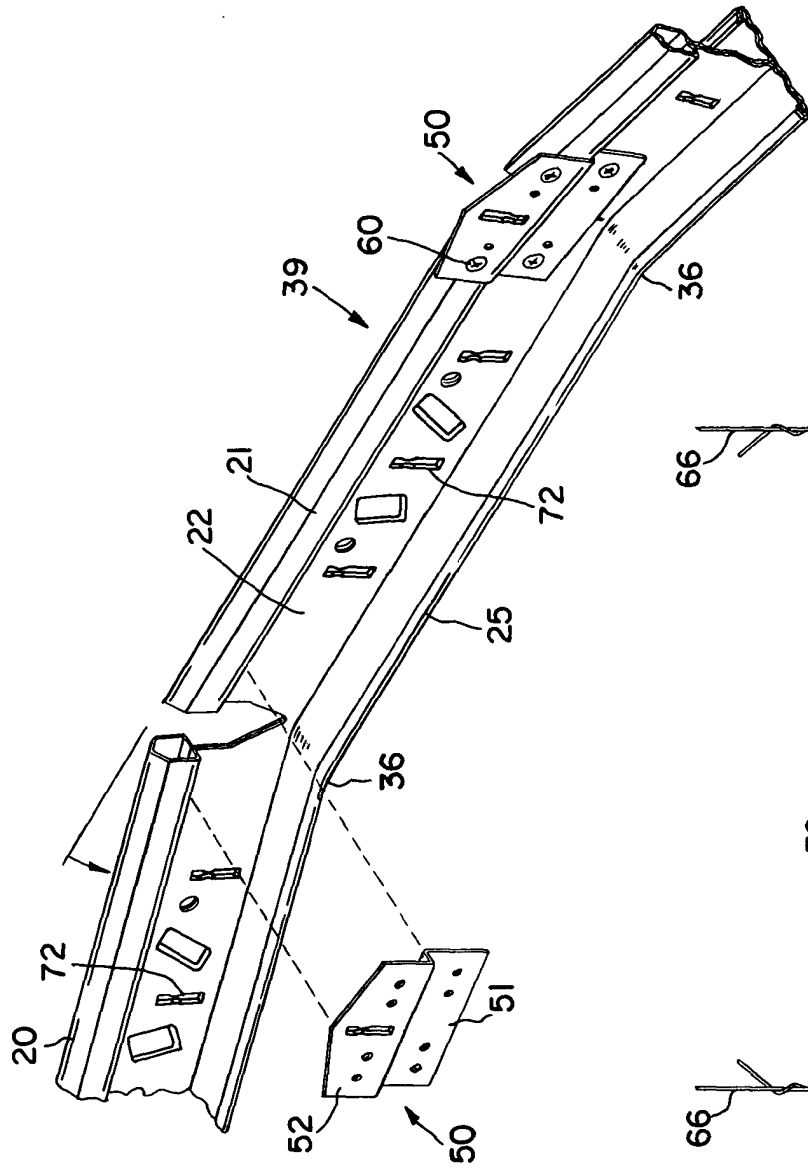


FIG. 6

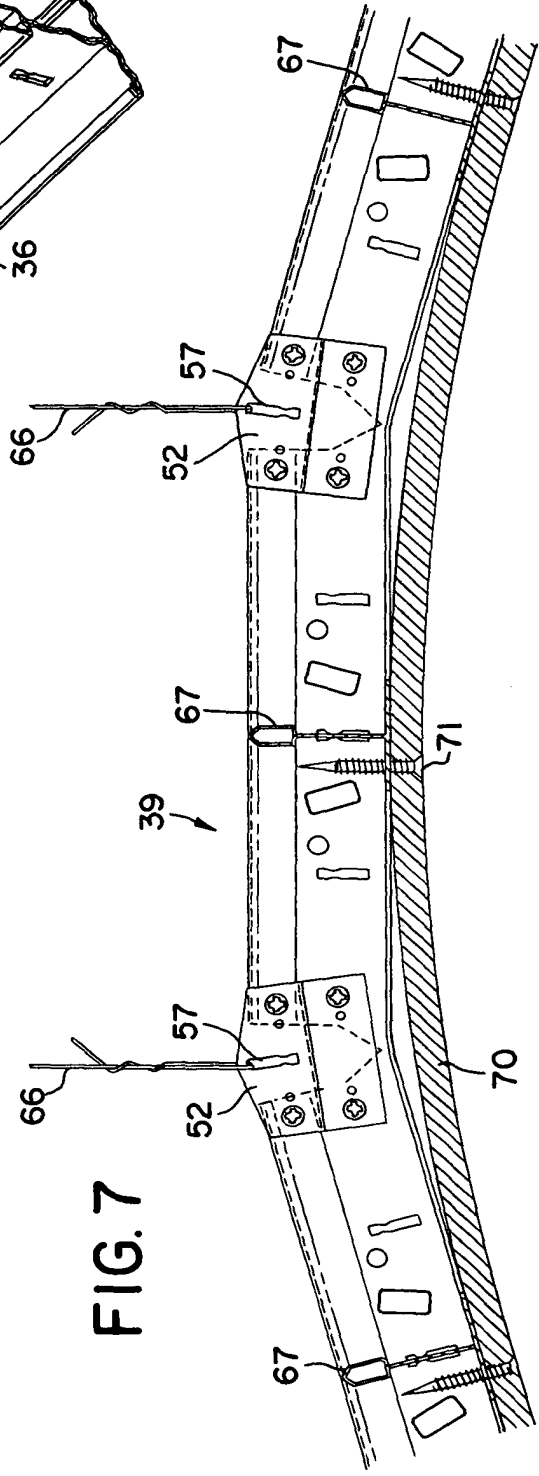


FIG. 7